


Parameter		Value
<b>Physical Parameter</b>	Pixel Configuration	DIP570
	Pixel Pitch (mm)	15.6x25
	Pixel matrix per panel	64x20
	Pixel density (pixels/sq.m.)	2560
	Cabinet Dimensions (LxWxH)/ (mm)	1000x500x78.5
	Module Dimensions (LxWxH)/ (mm)	500X250
	Transparency Rate	80%
	Panel material	Aluminum profile
	Cabinet weight (kg/panel)	9.62
	Module weight (kg/panel)	1.21
<b>Electronic Parameter</b>	Color Grayscale (Bit)	14bit
	Gray Scale per Color (level)	16384
	Refresh Rate (Hz)	1920
	Driving Type	static
	Signal Transmission Distance (m)	CAT5 cable: <100 m; Single mode fiber: <10 km
<b>Optical Parameter</b>	Brightness (nit)	6000
	Optimal Horizontal Viewing Angle (°)	100
	Optimal Vertical Viewing Angle (°)	100
<b>Electrical Parameter</b>	AC Input Voltage (V)	AC: 100-240V±10%
	AC Input Frequency (Hz)	50
	AC Input Power Maximum Value (W/m <sup>2</sup> )	416
	AC Input Power Typical Value (W/m <sup>2</sup> )	138
<b>Circumstance Parameter</b>	Storage Temperature (°C)	-40 -70
	Working Temperature (°C)	0-45
	IP rating (Front/Rear)	IP20/IP20
	Storage Humidity (RH)	10%~90% non-condensing
	Working Humidity (RH)	10%~60% non-condensing
	Lifetime Typical Value (hrs)	100000
<b>Installation Type</b>	Cabinet installation type	Fix/Rental
	Rigging Quantity (Vertical) (PCS)	10



**INA Display**

**C1525 pictures**

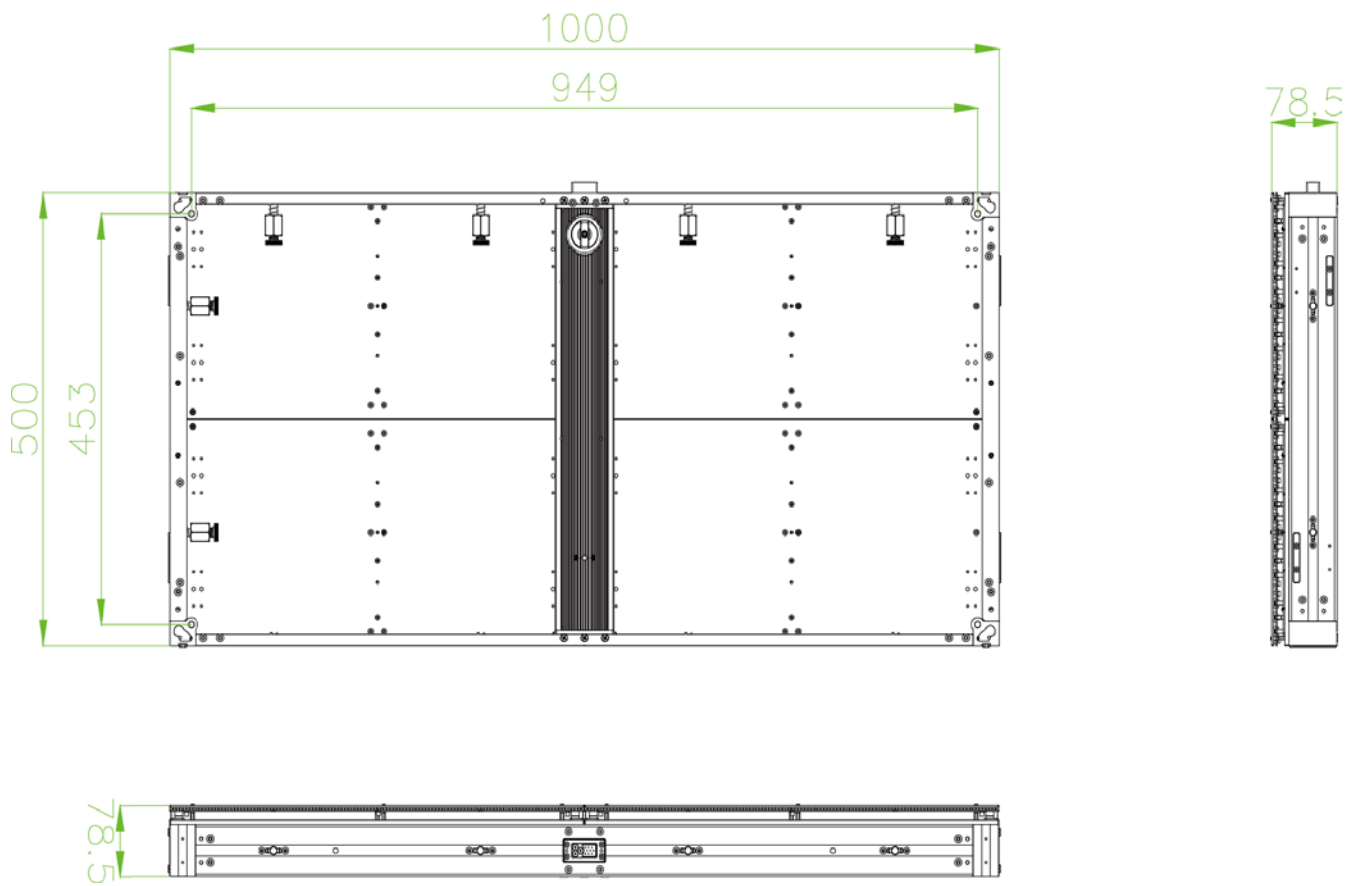