


M2.5 SPECIFICATIONS

Versions: V20180511

| Parameter | | Value |
|-------------------------------|--|---|
| Physical Parameter | Pixel Configuration | SMD2020 |
| | Pixel Pitch (mm) | 2.5 |
| | Pixel matrix per panel | 256x768 |
| | Pixel density (pixels/sq.m.) | 160000 |
| | Cabinet Dimensions (LxWxH)/ (mm) | Case Size: 695x1975x101 Display Size: 640x1920 |
| | Module Dimensions (LxWxH)/ (mm) | 320x160x14.5 |
| | Panel material | Aluminum profile |
| | Cabinet weight (kg/panel) | 45 |
| | Module weight (kg/panel) | 0.45 |
| Electronic Parameter | Color Grayscale (Bit) | ≥14bit |
| | Gray Scale per Color (level) | ≥16384 |
| | Refresh Rate (Hz) | 1920 |
| | Driving Type | 1/32 |
| | Signal Input Type | HDMI/WIFI (app) /USB |
| Optical Parameter | Brightness (nit) | 800 |
| | Optimal Horizontal Viewing Angle (°) | 140 |
| | Optimal Vertical Viewing Angle (°) | 140 |
| Electrical Parameter | AC Input Voltage (V) | AC: 100-240V±10% |
| | AC Input Frequency (Hz) | 50 |
| | AC Input Power Maximum Value (W/m ²) | 600 |
| | AC Input Power Typical Value (W/m ²) | 199 |
| Circumstance Parameter | Storage Temperature (°C) | -40 -60 |
| | Working Temperature (°C) | -10-40 |
| | IP rating (Front/Rear) | IP30/IP30 |
| | Storage Humidity (RH) | 10%~90% non-condensing |
| | Working Humidity (RH) | 10%~60% non-condensing |
| | Lifetime Typical Value (hrs) | 100000 |
| Installation Type | Cabinet installation type | Hanging/Standing |
| | Rigging Quantity (Vertical) (PCS) | / |

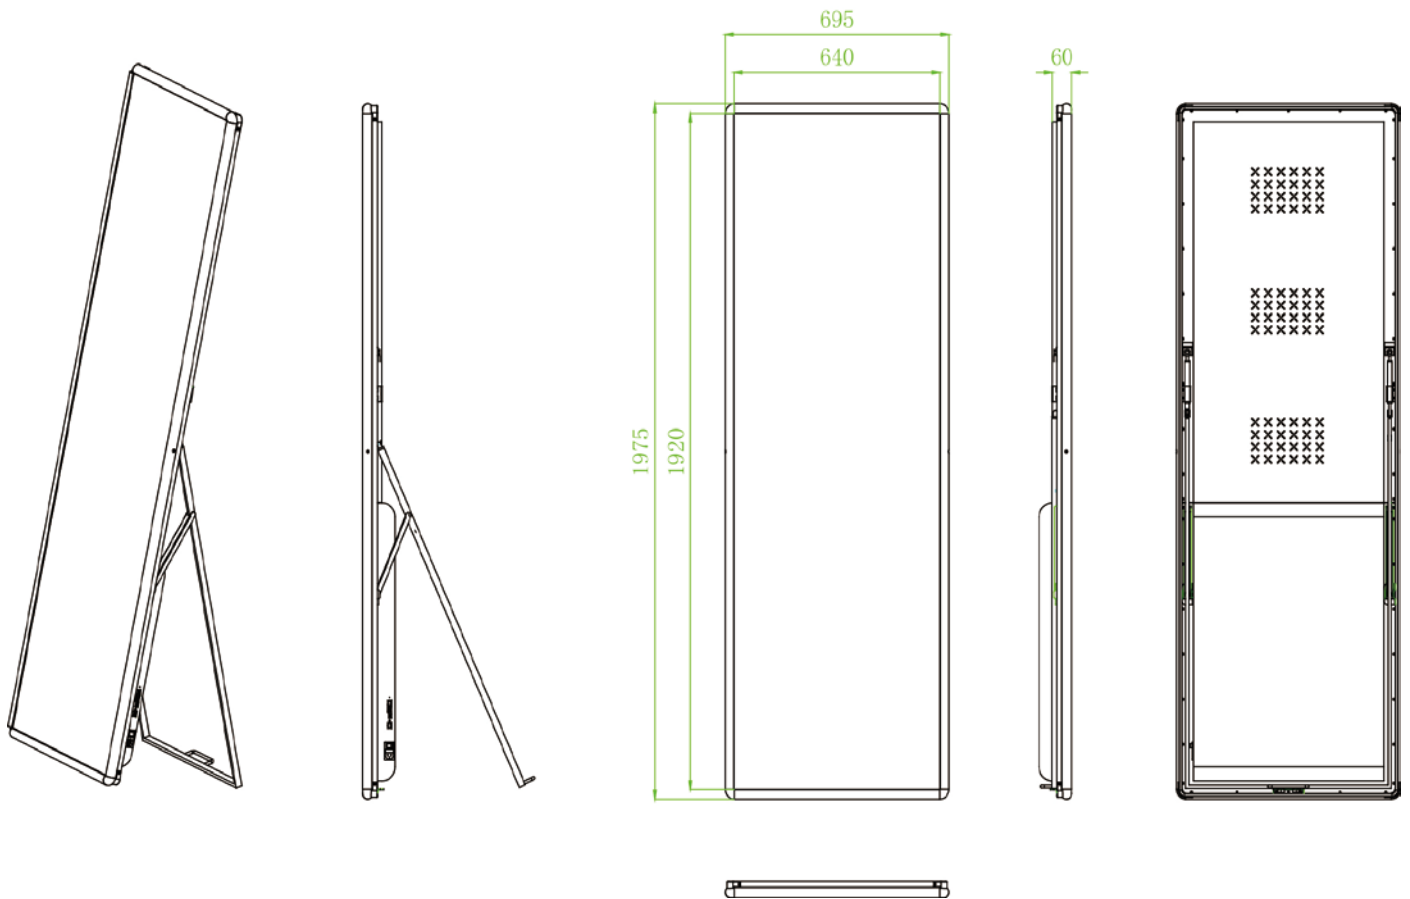

INA *Display*

M2.5 pictures

