
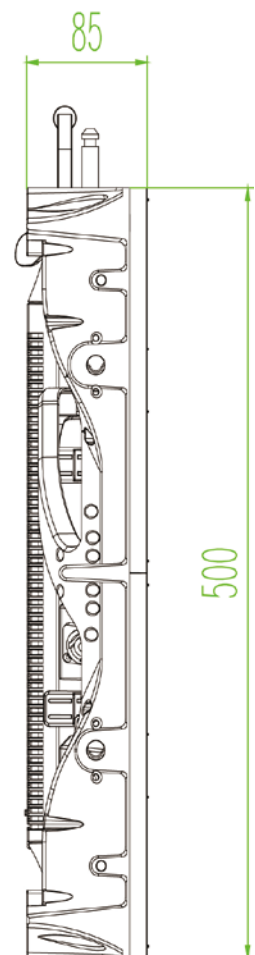
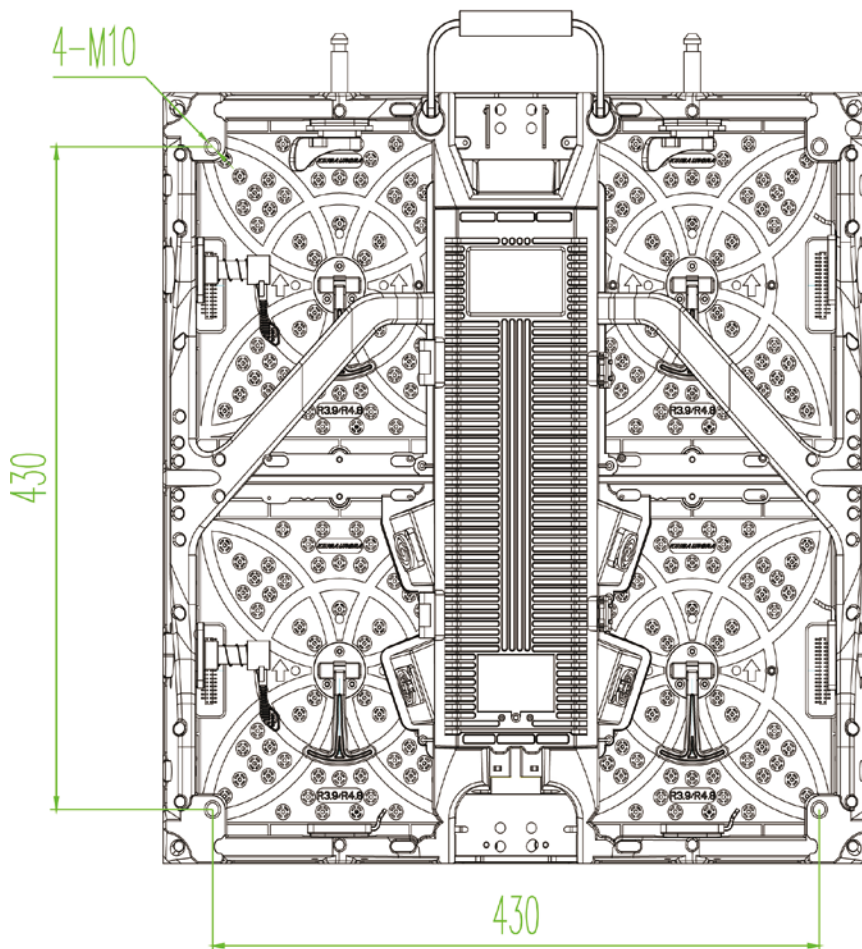


Parameter		Value
<b>Physical Parameter</b>	Pixel Configuration	SMD1921
	Pixel Pitch (mm)	3.9
	Pixel matrix per panel	128x128
	Pixel density (pixels/sq.m.)	65536
	Cabinet Dimensions (LxWxH)/ (mm)	500x500x85
	Module Dimensions (LxWxH)/ (mm)	250x250x14.5
	Panel material	magnesium alloy
	Cabinet weight (kg/panel)	7.4
	Module weight (kg/panel)	0.65
<b>Electronic Parameter</b>	Color Grayscale (Bit)	≥14bit
	Gray Scale per Color (level)	≥16384
	Refresh Rate (Hz)	1920/3840
	Driving Type	1/16
	Signal Transmission Distance (m)	CAT5 cable: <100 m; Single mode fiber: <10 km
<b>Optical Parameter</b>	Brightness (nit)	Standard white LED: 5000 Optional black LED: 3000、4000
	Optimal Horizontal Viewing Angle (°)	140
	Optimal Vertical Viewing Angle (°)	140
<b>Electrical Parameter</b>	AC Input Voltage (V)	AC: 100-240V/200-240V
	AC Input Frequency (Hz)	50
	AC Input Power Maximum Value (W/m <sup>2</sup> )	650
	AC Input Power Typical Value (W/m <sup>2</sup> )	217
<b>Circumstance Parameter</b>	Storage Temperature (°C)	-40 -60
	Working Temperature (°C)	-20-50
	IP rating (Front/Rear)	IP65/IP54
	Storage Humidity (RH)	10%~90% non-condensing
	Working Humidity (RH)	10%~90% non-condensing
	Lifetime Typical Value (hrs)	100000
<b>Installation Type</b>	Cabinet installation type	Rental
	Rigging Quantity (Vertical) (PCS)	20

# INA Display R3.9T Pro dimensional drawing

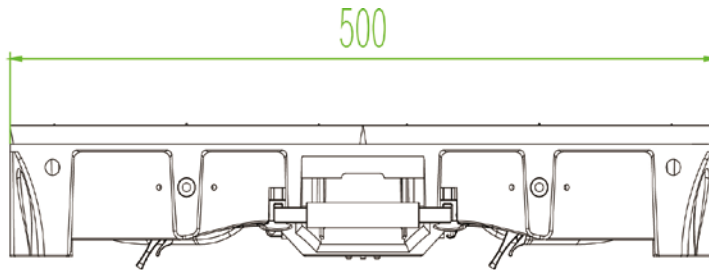

**INA Display**

**R3.9T Pro pictures**

