


| Parameter | | Value |
|-------------------------------|--|--|
| Physical Parameter | Pixel Configuration | SMD2121 |
| | Pixel Pitch (mm) | 3.9 |
| | Pixel matrix per panel | 256x128 |
| | Pixel density (pixels/sq.m.) | 65536 |
| | Cabinet Dimensions (LxWxH)/ (mm) | 1000x500x84 |
| | Module Dimensions (LxWxH)/ (mm) | 250x250X14 |
| | Panel material | Iron |
| | Cabinet weight (kg/panel) | 17 |
| | Module weight (kg/panel) | 0.55 |
| Electronic Parameter | Color Grayscale (Bit) | 14bit |
| | Gray Scale per Color (level) | 16384 |
| | Refresh Rate (Hz) | 3840 |
| | Driving Type | 1/16 |
| | Signal Transmission Distance (m) | CAT5 cable: <100 m; Single mode fiber: <10 km |
| Optical Parameter | Brightness (nit) | 1000 |
| | Optimal Horizontal Viewing Angle (°) | 140 |
| | Optimal Vertical Viewing Angle (°) | 140 |
| Electrical Parameter | AC Input Voltage (V) | AC: 100~240V |
| | AC Input Frequency (Hz) | 50 |
| | AC Input Power Maximum Value (W/m ²) | 570 |
| | AC Input Power Typical Value (W/m ²) | 190 |
| Circumstance Parameter | Storage Temperature (°C) | -40 -60 |
| | Working Temperature (°C) | -10-40 |
| | IP rating (Front/Rear) | IP30/IP30 |
| | Storage Humidity (RH) | 10%~90% non-condensing |
| | Working Humidity (RH) | 10%~60% non-condensing |
| | Lifetime Typical Value (hrs) | 100000 |
| Installation Type | Cabinet installation type | fix |
| | Rigging Quantity (Vertical) (PCS) | \ |



INA Display

V3.9 pictures

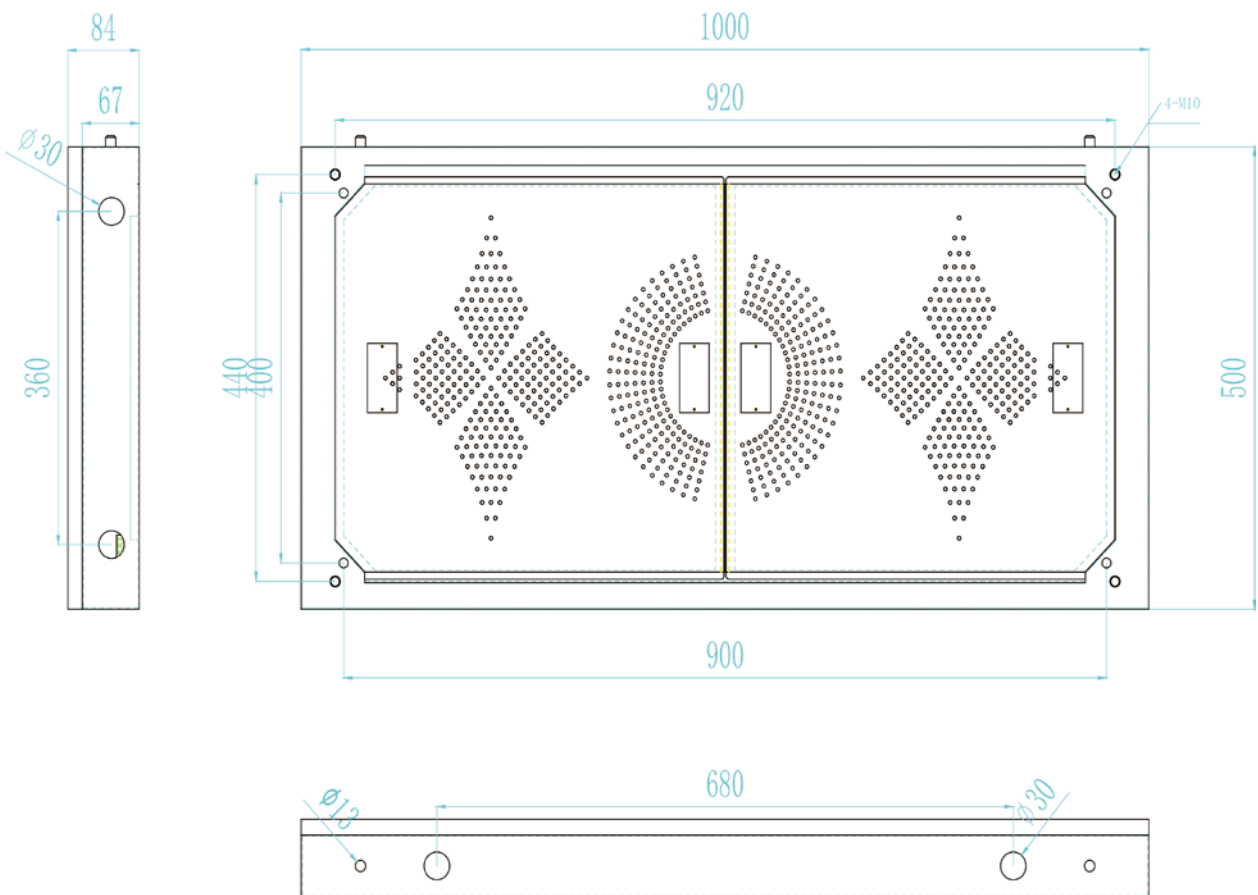