


Parameter		Value
Physical Parameter	Pixel Configuration	SMD2121
	Pixel Pitch (mm)	4.8
	Pixel matrix per panel	208X104
	Pixel density (pixels/sq.m.)	43264
	Cabinet Dimensions (LxWxH)/ (mm)	1000x500x84
	Module Dimensions (LxWxH)/ (mm)	250x250X13
	Panel material	Iron
	Cabinet weight (kg/panel)	15.4
	Module weight (kg/panel)	0.5
Electronic Parameter	Color Grayscale (Bit)	13bit
	Gray Scale per Color (level)	8192
	Refresh Rate (Hz)	1920
	Driving Type	1/13
	Signal Transmission Distance (m)	CAT5 cable: <100 m; Single mode fiber: <10 km
Optical Parameter	Brightness (nit)	1000
	Optimal Horizontal Viewing Angle (°)	140
	Optimal Vertical Viewing Angle (°)	140
Electrical Parameter	AC Input Voltage (V)	AC: 100~240V
	AC Input Frequency (Hz)	50
	AC Input Power Maximum Value (W/m ²)	600
	AC Input Power Typical Value (W/m ²)	200
Circumstance Parameter	Storage Temperature (°C)	-40 -60
	Working Temperature (°C)	-10-40
	IP rating (Front/Rear)	IP30/IP30
	Storage Humidity (RH)	10%~90% non-condensing
	Working Humidity (RH)	10%~60% non-condensing
	Lifetime Typical Value (hrs)	100000
Installation Type	Cabinet installation type	fix
	Rigging Quantity (Vertical) (PCS)	\



INA Display

V4.8 pictures

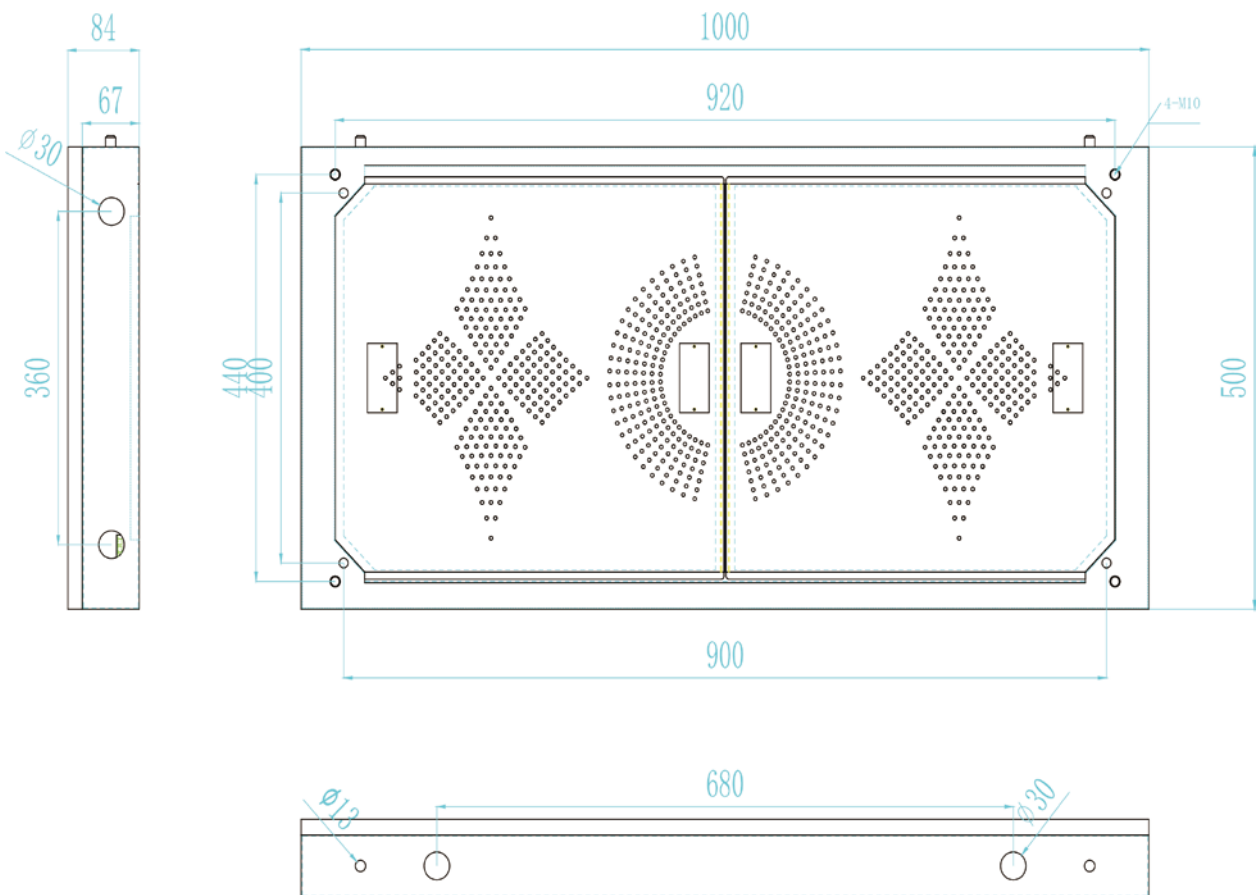