
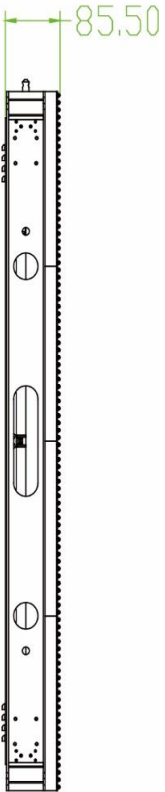
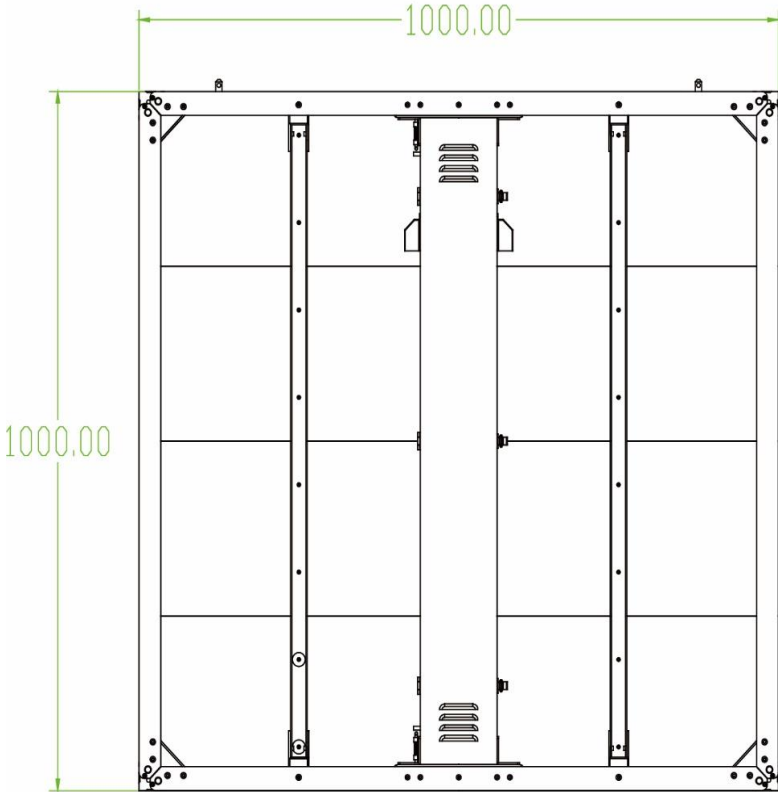


Parameter		Value
<b>Physical Parameter</b>	Pixel Configuration	DIP570
	Pixel Pitch (mm)	8.3x8.3
	Pixel matrix per panel	120x120
	Pixel density (pixels/sq.m.)	14400
	Cabinet Dimensions (LxWxH)/ (mm)	1000X1000X85
	Module Dimensions (LxWxH)/ (mm)	500x250x25
	Panel material	Aluminum profile
	Cabinet weight (kg/panel)	29.5
	Module weight (kg/panel)	1.3
<b>Electronic Parameter</b>	Color Grayscale (Bit)	14bit
	Gray Scale per Color (level)	16384
	Refresh Rate (Hz)	1380
	Driving Type	5s
	Signal Transmission Distance (m)	CAT5 cable: <100 m; Single mode fiber: <10 km
<b>Optical Parameter</b>	Brightness (nit)	8000
	Optimal Horizontal Viewing Angle (°)	100
	Optimal Vertical Viewing Angle (°)	100
<b>Electrical Parameter</b>	AC Input Voltage (V)	AC: 200-240V
	AC Input Frequency (Hz)	60
	AC Input Power Maximum Value (W/m <sup>2</sup> )	508
	AC Input Power Typical Value (W/m <sup>2</sup> )	169
<b>Circumstance Parameter</b>	Storage Temperature (°C)	-40 -70
	Working Temperature (°C)	-40-70
	IP rating (Front/Rear)	IP65/IP65
	Storage Humidity (RH)	10%~90% non-condensing
	Working Humidity (RH)	10%~90% non-condensing
	Lifetime Typical Value (hrs)	100000
<b>Installation Type</b>	Cabinet installation type	Fix
	Rigging Quantity (Vertical) (PCS)	\

# INA Display B0808 Pro dimensional drawing



**INA** *Display*

**B0808 Pro pictures**

